



Test Report: LRS-350-12

350W Single Output Switching Power Supply

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY TEST



■ RELIABILITY TEST

ENVIRONMENT TEST



DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 10.2V- 13.8V	I/P: 230 VAC I/P: 115 VAC O/P: MIN LOAD Ta: 25°C	9.609V~14.140V/230VAC 9.605V~14.151V/115VAC
2	OUTPUT VOLTAGE(Max) TOLERANCE	V1: -1.5%~ 1.5%	I/P: 100VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1:- 0.08%~ 0.08%
3	LINE REGULATION (Max)	V1: -0.5%~ 0.5%	I/P: 100VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1: -0.04%~-0.04%
4	LOAD REGULATION(Max)	V1: -1%~ 1%	I/P: 230VAC O/P:FULL -MIN LOAD Ta:25°C	V1:-0.0%~ 0%
5	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	<5%
6	RIPPLE & NOISE(Max)	V1: 150mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 123mVp-p

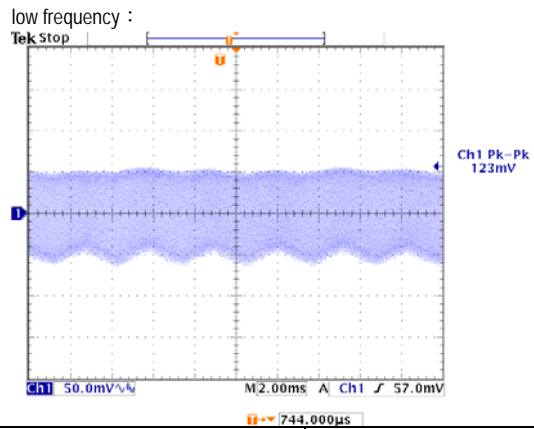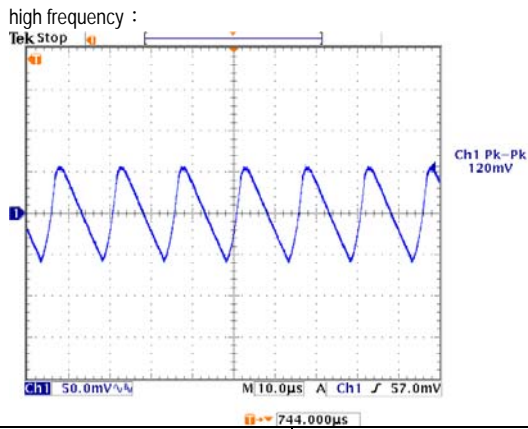

7	SET UP TIME(Max)	230VAC/1300ms 115VAC/ 1300ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 1028ms 115VAC/ 1032ms
---	------------------	---------------------------------	--	----------------------------------

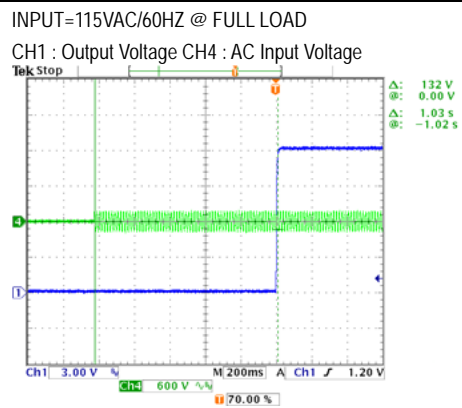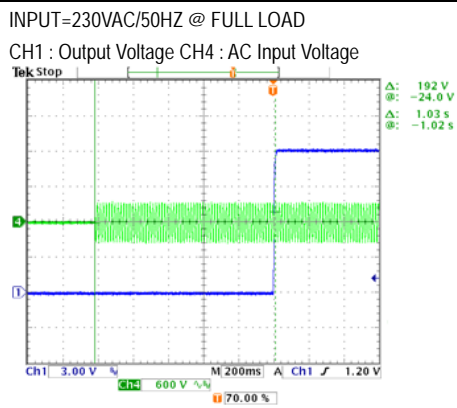





350W Single Output Switching Power Supply

LRS-350series

8	RISE TIME (Max)	230VAC/ 50ms 115VAC/ 50ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 6.80ms 115VAC/6.40ms
INPUT=230VAC/50HZ @ FULL LOAD		INPUT=115VAC/60HZ @ FULL LOAD		
CH1 : Output Voltage		CH1 : Output Voltage		
9	HOLD UP TIME(Typ)	230VAC/ 16ms 115VAC/ 12ms	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	230VAC/26.0ms 115VAC/ 21.6ms
INPUT=230VAC/50HZ @ FULL LOAD		INPUT=115VAC/60HZ @ FULL LOAD		
CH1 : Output Voltage CH4 : AC Input Voltage		CH1 : Output Voltage CH4 : AC Input Voltage		
10	DYNAMIC LOAD	V1: 1200mVp-p	I/P: 230VAC O/P: (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta:25°C	274mVp-p 304mVp-p
FULL /50% LOAD 50%DUTY / 120HZ		FULL /50% LOAD 50%DUTY / 1KHZ		

INPUT FUNCTION TEST


NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	180VAC~264VAC	I/P:TESTING O/P:FULL LOAD Ta:25°C	149V~264V
			I/P: (1)LOW-LINE-3V=167 V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD ON: 30 Sec OFF: 30 Sec 10MIN (2)230Vac ON: 0.5 Sec OFF: 0.5 Sec 20MIN (3)230Vac ON:3Sec OFF:3Sec 12HOURS (POWER ON/OFF NO DAMAGE)	TEST:OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:170 VAC ~264 VAC O/P:FULL-MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (Typ)	230V/ 3.4A 115V/ 6.8A	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	I =3.41A/ 230VAC I =6.25A/ 115VAC
4	LEAKAGE CURRENT	< 2 mA / 240 VAC	I/P: 240 VAC O/P: Min LOAD Ta: 25°C	L-FG: 0.481mA N-FG: 0.481mA
5	NO LOAD CONSUMPTION	< 0.75 W	I/P: 115VAC I/P: 230VAC O/P: NO LOAD Ta: 25°C	< 0.55W < 0.60 W
6	INRUSH CURRENT(Typ)	230V/ 60A 115V/ 60A COLD START	I/P: 230 VAC I/P: 115 VAC O/P: FULL LOAD Ta: 25°C	I =49.2A/ 230VAC I =36.0A/ 115VAC

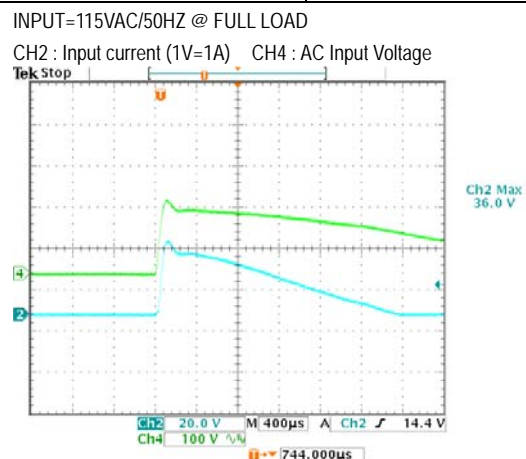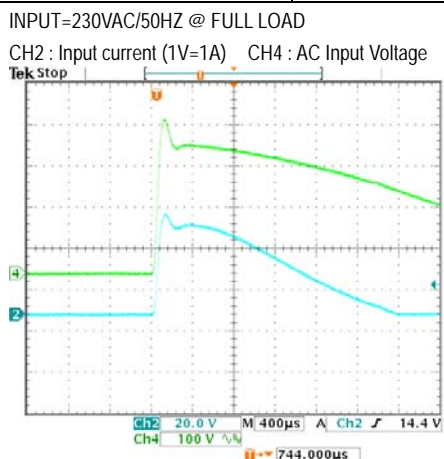



350W Single Output Switching Power Supply

LRS-350series

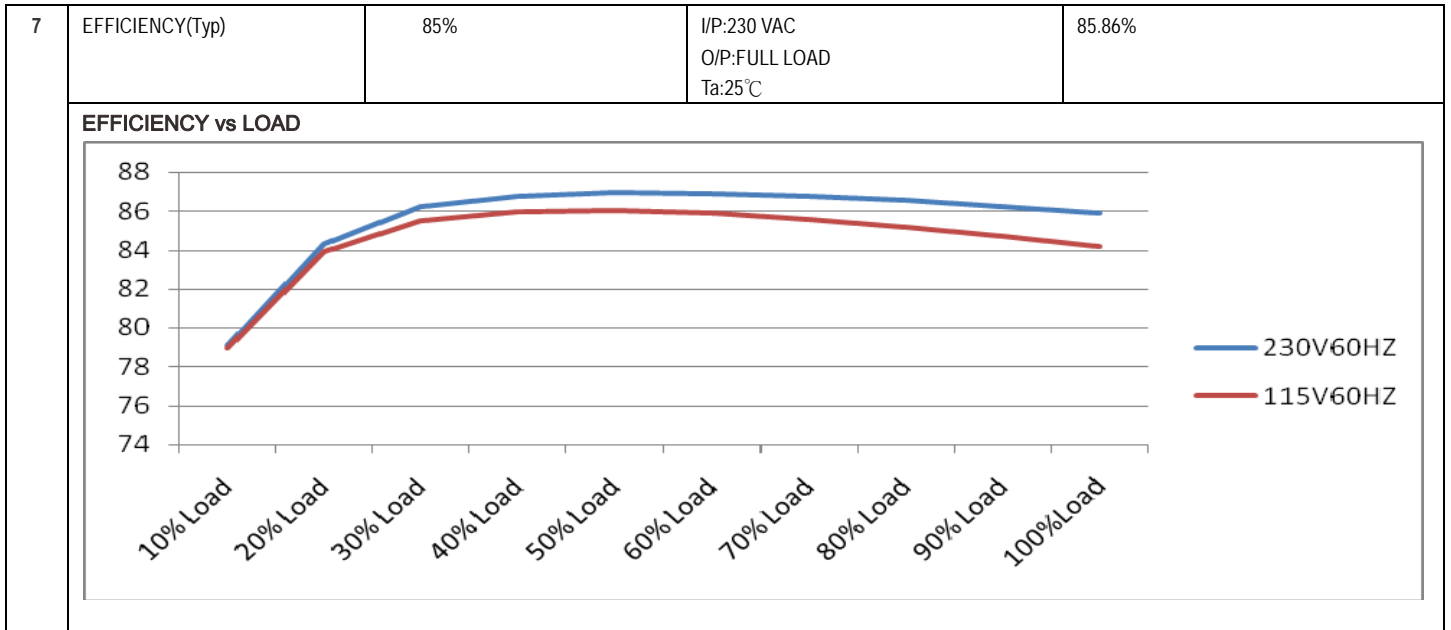

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	110 %- 140 %	I/P: 230VAC I/P: 115VAC O/P: TESTING Ta:25°C	122.07%/ 230VAC 121.86%/115VAC Hiccup mode, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	CH: 13.8V-16.2 V	I/P: 230VAC I/P: 115VAC O/P: MIN LOAD Ta:25°C	15.1V/ 230VAC 15.0V/115VAC Hiccup mode, recovers automatically after fault condition is removed
3	OVER TEMPERATURE PROTECTION	NO DAMAGE	I/P: 230 VAC O/P: FULL LOAD	O.T.P. Active Hiccup mode, recovers automatically after fault condition is removed
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE Hiccup mode, recovers automatically after fault condition is removed

**COMPONENT STRESS TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q1 Rated 13A/500V	I/P:High-Line +3V =267V O/P: (1)Full Load Turn on (2)Output Short (3)Full Load Continue Ta:25°C	(1)468V (2)484V (3)446V
2	Diode Peak Voltage	Q102 Rated 20 A/120V Q103 Rated 20A/120V	I/P:High-Line +3V =267 V O/P: (1)Full Load input on/off (2)Output Short (3)Full Load Continue Ta:25°C	Q102 (1)94.8V (2)89.2V (3)82.0V Q103: (1)87.2V (2)80.0V (3)81.2V
3	Input Capacitor Voltage	C5 Rated: 560 μ / 200V	I/P:High-Line +3V =267 V O/P: (1)Full Load input on/off (2) MinLoad input on /Off (3)Full Load /Min load Change Ta:25°C	(1)194V (2)183V (3)194V
4	Control IC Voltage Test	PWM IC U1 Rated 28 V (MAX.) 10V (MIN.)	I/P:High-Line +3V =267 V O/P: (1)Full Load input on/off (2)Min Load input on/off (3)Full Load/Min load change Ta:25°C	U1 (1) 19.6V (2) 19.4V (3) 19.6V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3KVAC/min I/P-FG :2KVAC/min O/P-FG:0.5KVAC/min	I/P-O/P: 3.6 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:0.6 KVAC/min Ta:25°C	I/P-O/P: 2. 435mA I/P-FG: 3. 34mA O/P-FG: 2. 74m A NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100M Ω I/P-FG: 500VDC>100M Ω O/P-FG:500VDC>100M Ω	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: 9999M Ω I/P-FG: 9999M Ω O/P-FG: 9999M Ω NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 m Ω	40A / 2min Ta:25°C	23 m Ω



RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																								
1	TEMPERATURE RISE TEST	MODEL: LRS-350-5 1. ROOM AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta=23.5°C 2. HIGH AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta=52.9°C																																																																										
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 23.5 °C</th> <th>HIGH AMBIENT Ta=52.9 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>LF1</td><td>41.5°C</td><td>72.0°C</td></tr> <tr><td>2</td><td>L100</td><td>74.7°C</td><td>113.3°C</td></tr> <tr><td>3</td><td>C105</td><td>57.2°C</td><td>90.9°C</td></tr> <tr><td>4</td><td>T1</td><td>68.6°C</td><td>103.0°C</td></tr> <tr><td>5</td><td>BD1</td><td>42.3°C</td><td>71.0°C</td></tr> <tr><td>6</td><td>C5</td><td>35.7°C</td><td>62.7°C</td></tr> <tr><td>7</td><td>T2</td><td>29.6°C</td><td>57.8°C</td></tr> <tr><td>8</td><td>Q2</td><td>42.9°C</td><td>74.9°C</td></tr> <tr><td>9</td><td>Q1</td><td>41.5°C</td><td>73.0°C</td></tr> <tr><td>10</td><td>Q103</td><td>58.3°C</td><td>90.3°C</td></tr> <tr><td>11</td><td>Q102</td><td>59.4°C</td><td>92.4°C</td></tr> <tr><td>12</td><td>Q104</td><td>57.1°C</td><td>88.7°C</td></tr> <tr><td>13</td><td>U1</td><td>29.9°C</td><td>58.6°C</td></tr> <tr><td>14</td><td>U100</td><td>60.1°C</td><td>91.5°C</td></tr> <tr><td>15</td><td>D10</td><td>35.7°C</td><td>65.1°C</td></tr> <tr><td>16</td><td>C36</td><td>27.5°C</td><td>56.3°C</td></tr> <tr><td>17</td><td>RTH3</td><td>50.9°C</td><td>80.3°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 23.5 °C	HIGH AMBIENT Ta=52.9 °C	1	LF1	41.5°C	72.0°C	2	L100	74.7°C	113.3°C	3	C105	57.2°C	90.9°C	4	T1	68.6°C	103.0°C	5	BD1	42.3°C	71.0°C	6	C5	35.7°C	62.7°C	7	T2	29.6°C	57.8°C	8	Q2	42.9°C	74.9°C	9	Q1	41.5°C	73.0°C	10	Q103	58.3°C	90.3°C	11	Q102	59.4°C	92.4°C	12	Q104	57.1°C	88.7°C	13	U1	29.9°C	58.6°C	14	U100	60.1°C	91.5°C	15	D10	35.7°C	65.1°C	16	C36	27.5°C	56.3°C	17	RTH3	50.9°C	80.3°C
NO	Position	ROOM AMBIENT Ta= 23.5 °C	HIGH AMBIENT Ta=52.9 °C																																																																									
1	LF1	41.5°C	72.0°C																																																																									
2	L100	74.7°C	113.3°C																																																																									
3	C105	57.2°C	90.9°C																																																																									
4	T1	68.6°C	103.0°C																																																																									
5	BD1	42.3°C	71.0°C																																																																									
6	C5	35.7°C	62.7°C																																																																									
7	T2	29.6°C	57.8°C																																																																									
8	Q2	42.9°C	74.9°C																																																																									
9	Q1	41.5°C	73.0°C																																																																									
10	Q103	58.3°C	90.3°C																																																																									
11	Q102	59.4°C	92.4°C																																																																									
12	Q104	57.1°C	88.7°C																																																																									
13	U1	29.9°C	58.6°C																																																																									
14	U100	60.1°C	91.5°C																																																																									
15	D10	35.7°C	65.1°C																																																																									
16	C36	27.5°C	56.3°C																																																																									
17	RTH3	50.9°C	80.3°C																																																																									
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P: 230 VAC O/P: 113 % LOAD Ta: 25°C	TEST: OK																																																																								
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 264VAC/100VAC O/P: 100 % LOAD Ta= -25 °C	TEST: OK																																																																								
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C NO DAMAGE	I/P: 272 VAC O/P: FULL LOAD Ta= 50 °C HUMIDITY= 95 %R.H	TEST: OK																																																																								
5	TEMPERATURE COEFFICIENT	± 0.03 %/°C (0-50°C)	I/P: 230 VAC O/P: FULL LOAD	±0%/°C (0-50°C)																																																																								
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		OK																																																																								
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -25°C~ 70°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC/Fu11 Load AC ON/OFF TEST turn on 58sec ; turn off 2sec		OK																																																																								



350W Single Output Switching Power Supply

LRS-350series

8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10-500Hz (3) Sweep Time: 10min/sweep cycle (4) Acceleration: 5G (5) Test Time: 60min in each axis (X.Y.Z) (6) Ta: 25°C	TEST: OK
9	CAPACITOR LIFE CYCLE	SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P: 230VAC O/P: FULL LOAD Ta= 25 °C LIFE TIME (2) I/P: 230VAC O/P: FULL LOAD Ta= 50 °C LIFE TIME (3) I/P: 230VAC O/P: 75% LOAD Ta= 50 °C LIFE TIME (4) I/P: 230VAC O/P: 50% LOAD Ta= 50 °C LIFE TIME	(1) 276816HRS (2) 36335HRS (3) 108557HRS (4) 220246HRS
10	MTBF	MIL-HDBK-217F TOTAL FAILURE RATE: 327.9KHRS	
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 30,000 hours @ TA 50°C	

TEST RESULT	TESTER	APPROVAL
PASS	FRANK	WANGDEZHAO